

MY SURF CONNECT – Quick start guide

CAUTION

- Please retain this document for further use.
- Connect only to the compliant diagnostic connector in the JetSurf board.
- Do not expose the product to chemicals.
- Do not install My Surf Connect to running JetSurf board.


My Surf Connect set contains:

- 1 x My Surf Connect antenna
- 4 x screw 5
- 4 x washer
- 1 x sealing ring



Installation

My Surf Connect is designed for installation on the top of the JetSurf board. To achieve the maximum possible communication range, install it on the JetSurf hull in a place that is not exposed to water and not covered by other Jetsurf equipment (external fuel tank, waterproof bags, straps, etc.). The ideal position is in the center of Jetsurf handles. Please be sure not to place it in the air box in the inner engine compartment, but right in front of the fuel tank, close to the diagnostic connector. Recommended placement:

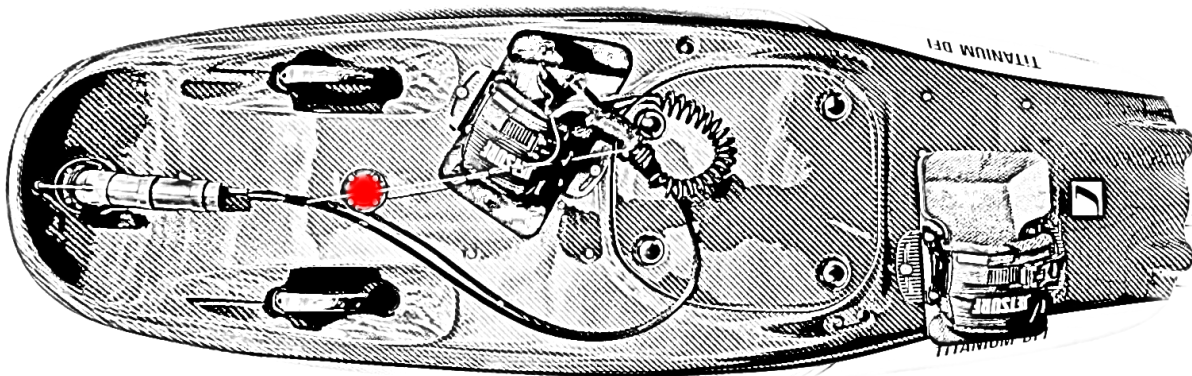

Installation steps:

1. Be sure your JetSurf board is **OFF!**
2. Remove the fuel tank from the JetSurf.
3. JetSurf model:
 - a. Jetsurf **Titanium 2023 and newer** – Disassemble the cover of the diagnostic output in the front of the JetSurf (Marked red in the above Jetsurf picture).
 - b. **Other** JetSurf models – Drill 5 holes according to the **DIY instructions**.
4. Insert the sealing ring into the My Surf Connect bottom side and place this in the prepared hole.



5. Use a **size 5 Allen wrench** and tighten all 4 screws (it is recommended to use glue on the tip of the screws against the unintentional loosening of the screws, i.e., Loctite 243).
6. Disconnect the dummy **4-pin** connector from the diagnostic connector in the JetSurf.
7. Connect the My Surf Connect connector to the JetSurf diagnostic connector.

Pairing with Bluetooth device

The My Surf Connect can be paired with your Garmin Watch, iOS, or Android device by Bluetooth.

1. Activate your JetSurf (JetSurf idle mode is signaled by a yellow flashing color)
2. Place the magnet (JetSurf engine shut-off key) over the top center of the My Surf Connect electronic for **7 seconds** (this activates pairing mode in the MySurf Connect).
3. Download and start your application (pairing **PIN code** in application is **123456**).

Garmin Watch



Search My Jetsurf app in the Garmin Connect IQ Store.

Download and Install the **My JetSurf App** from Garmin Connect IQ Store



Run **My JetSurf** in your Garmin watches

Apple iOS + Watch



Download from Apple Store



Run the **MySurf Connect** app



Android



Download from Google Play



Run the **MySurf Connect** app



4. Follow instructions in the app or see tutorials on the website www.MySurfConnect.com

DIY instructions

For custom placement of the MySurf Connect antenna or placement on JetSurf models without a diagnostic hole, use this drawing of the center hole and screw locations. The center hole diameter is 35 mm (1.378 inches), and the drilled hole size for the screws is 7 mm (1/4 inch).

CAUTION

- Keep safety and use health protection during the mechanical changes of the JetSurf board.
- Be **aware of carbon dust!** Avoid inhaling the carbon dust! Protect your eyes!
- Drilling or any mechanical damage of the JetSurf leads to loss of warranty.
- Disassemble the motor before drilling and carefully clean the inner JetSurf space.

